



**PLAN VIEW**

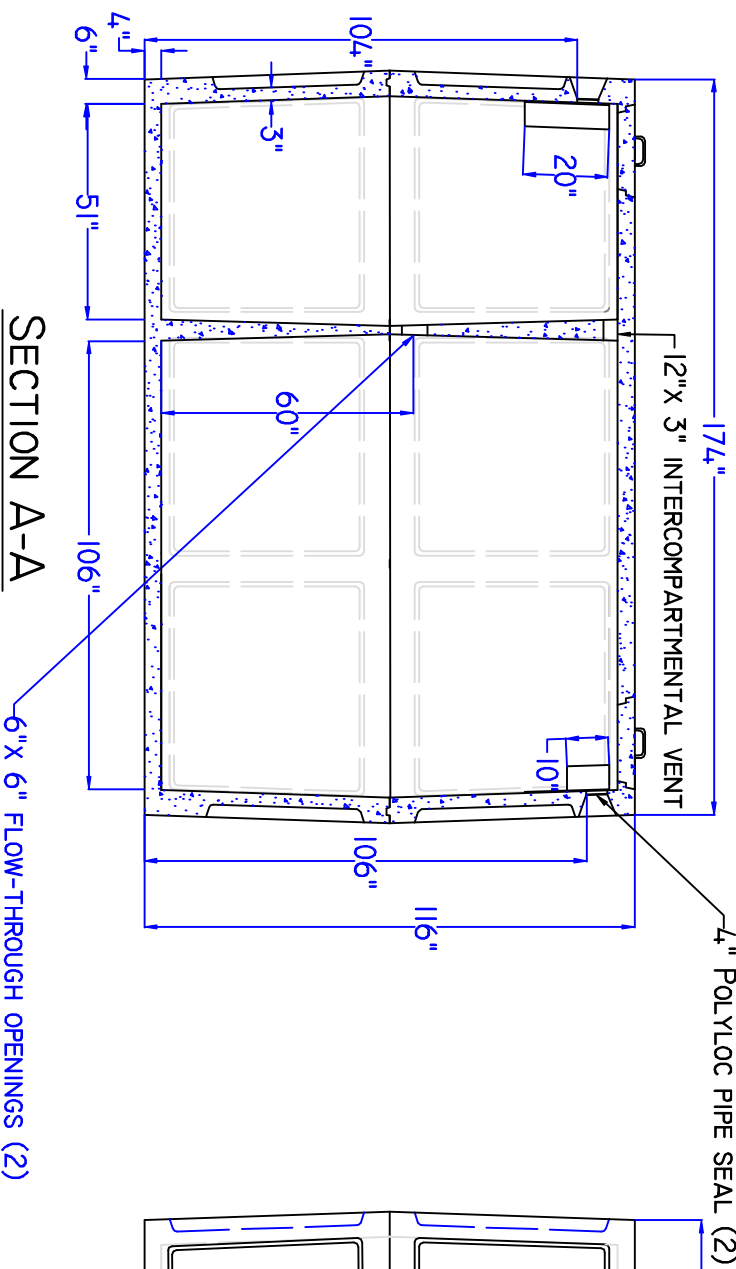

**SECTION A-A**

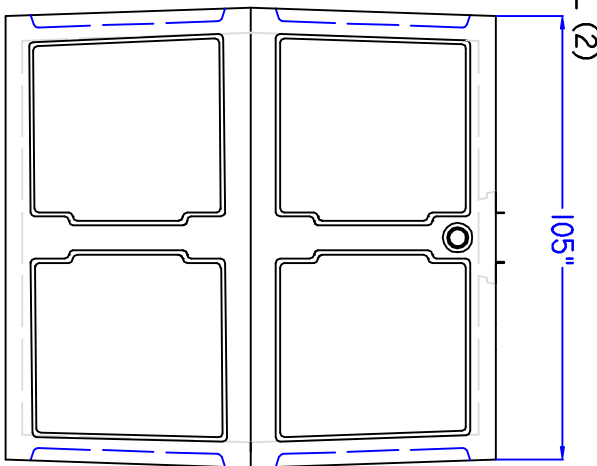

**END VIEW**

**5500 Gal. (25,000L) Septic Tank**

**Notes:**

1. Concrete - 32 Mpa. Air 5-7%
2. Rebar - 15m @ 12" c/c in floor and top. 4" c/c in columns.
3. Joint sealed with butyl sealer.
4. Place on 8" of sand.
5. Approx. weight - 18000 kgs.

**Acton Precast Concrete Limited**

RR 2 Acton, Ont. L7J 2L8 1-800-461-1516